



SECTION A - A



SECTION B - B

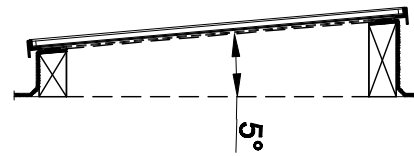


DETAIL

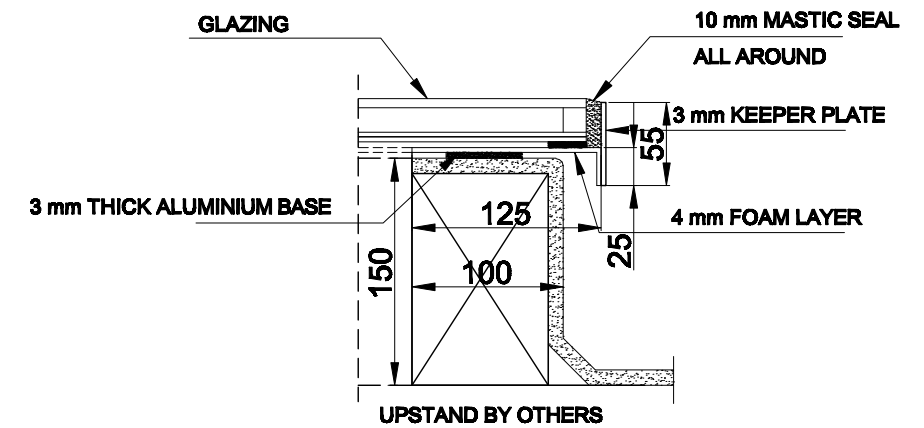

BBS - Mk. 8 rooflights can be manufactured to any bespoke size requested by the customer .
 Mk.8 rooflights are fitted with standard glazing comprising 6 mm clear toughened outer , 16 mm argon cavity and 6,4 mm clear laminated low E inner .
 Other glass specifications such as obscure , self cleaning and solar control are available on request .
 Panel sizes should not exceed 1270 mm x 1270 mm if the rooflight has to comply with ACR [M]001:20122 requirements .
 Mk. 8 rooflights are also available as Walk-on rooflights
 Mk. 8 rooflights should not be fitted to roof pitches above 15 degrees.

UPSTAND (by others)

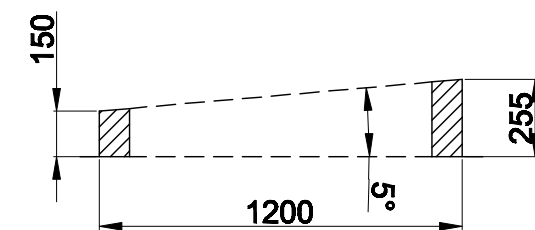

THIS UPSTAND IS ONLY AN EXAMPLE
 IF THE ROOFLIGHT IS LARGER THE HEIGHT OF THE UPSTAND ON THE BACK WILL BE HIGHER .
 THE FRONT HAS TO BE MIN. 150 mm HIGH.

DRAWING NUMBER :	DRAWING TITLE:	FIRST ISSUE DATE:
A3 - MK8 - WEB 10	BBS-MARK 8 MONO-PITCH ROOFLIGHT ON SLOPED UPSTAND , FLUSH GLAZED	OCT.2013
BBS Building Components		SCALE:
		1:25 / 1:5