


### SECTION A - A




### SECTION B - B

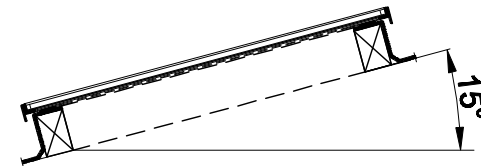

ROOF SLOPE NOT TO EXCEED 15 °

BBS - Mk. 8 rooflights can be manufactured to any bespoke size requested by the customer .  
 Mk.8 rooflights are fitted with standard glazing comprising 6 mm clear toughened outer , 16 mm argon cavity and 6,4 mm clear laminated low E inner .  
 Other glass specifications such as obscure , self cleaning and solar control are available on request .  
 Panel sizes should not exceed 1270 mm x 1270 mm if the rooflight has to comply with ACR [M]001:20122 requirements .  
 Mk. 8 rooflights are also available as Walk-on rooflights  
 Mk. 8 rooflights should not be fitted to roof pitches above 15 degrees.

### DETAIL

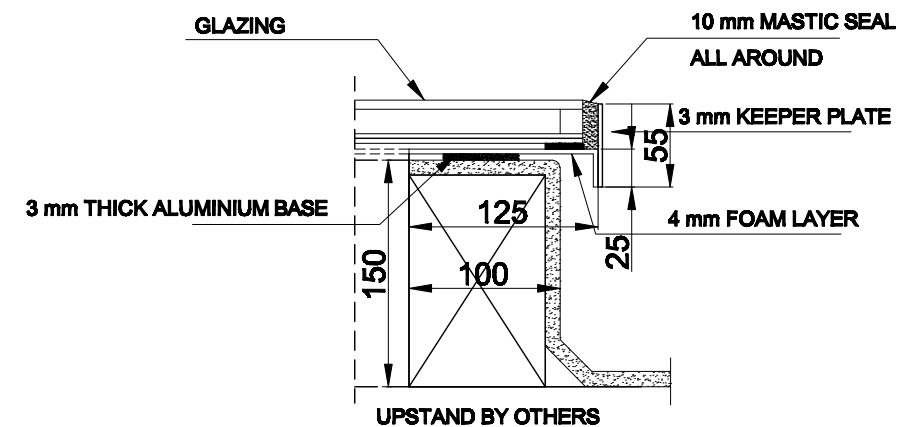

DRAWING NUMBER :	<b>A3 - MK8 - WEB 11</b>	DRAWING TITLE:	<b>BBS-MARK 8 MONO-PITCH ROOFLIGHT ON SLOPED ROOF , FLUSH GLAZED</b>	FIRST ISSUE DATE:	<b>OCT.2013</b>
	<b>BBS Building Components</b>			SCALE:	<b>1:25 / 1:5</b>