




**SECTION A - A**

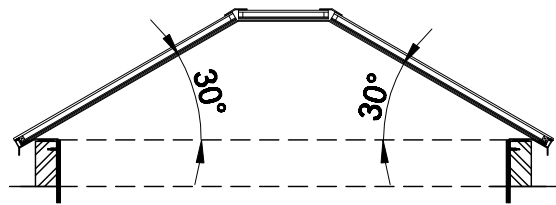

**SECTION B - B**

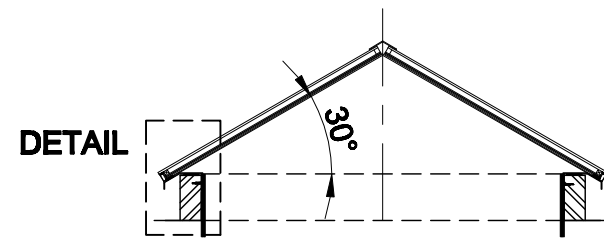


**PLAN VIEW**

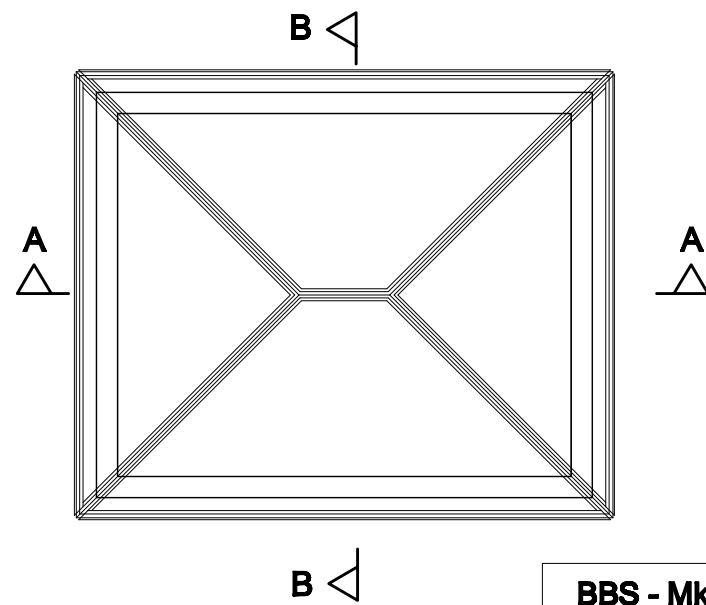

**BBS - Mk. 7 contemporary pyramid rooflights can be manufactured to any bespoke size requested by the customer , up to a maximum roof opening size of 1200 x 2400 mm**  
**Mk.7 rooflights are fitted with standard glazing comprising 6 mm clear toughened outer , 16 mm argon cavity and 6,4 mm clear laminated low E inner .**  
**Other glass specifications such as obscure , self cleaning and solar control are available on request .**  
**Panel sizes should not exceed 1270 mm x 1270 mm if the rooflight has to comply with ACR [M]001:20122 requirements .**

**Mk. 7 rooflights are fitted inside the roof opening with countersunk screws to allow the customer to fit plasterboards on top of the BBS-base**

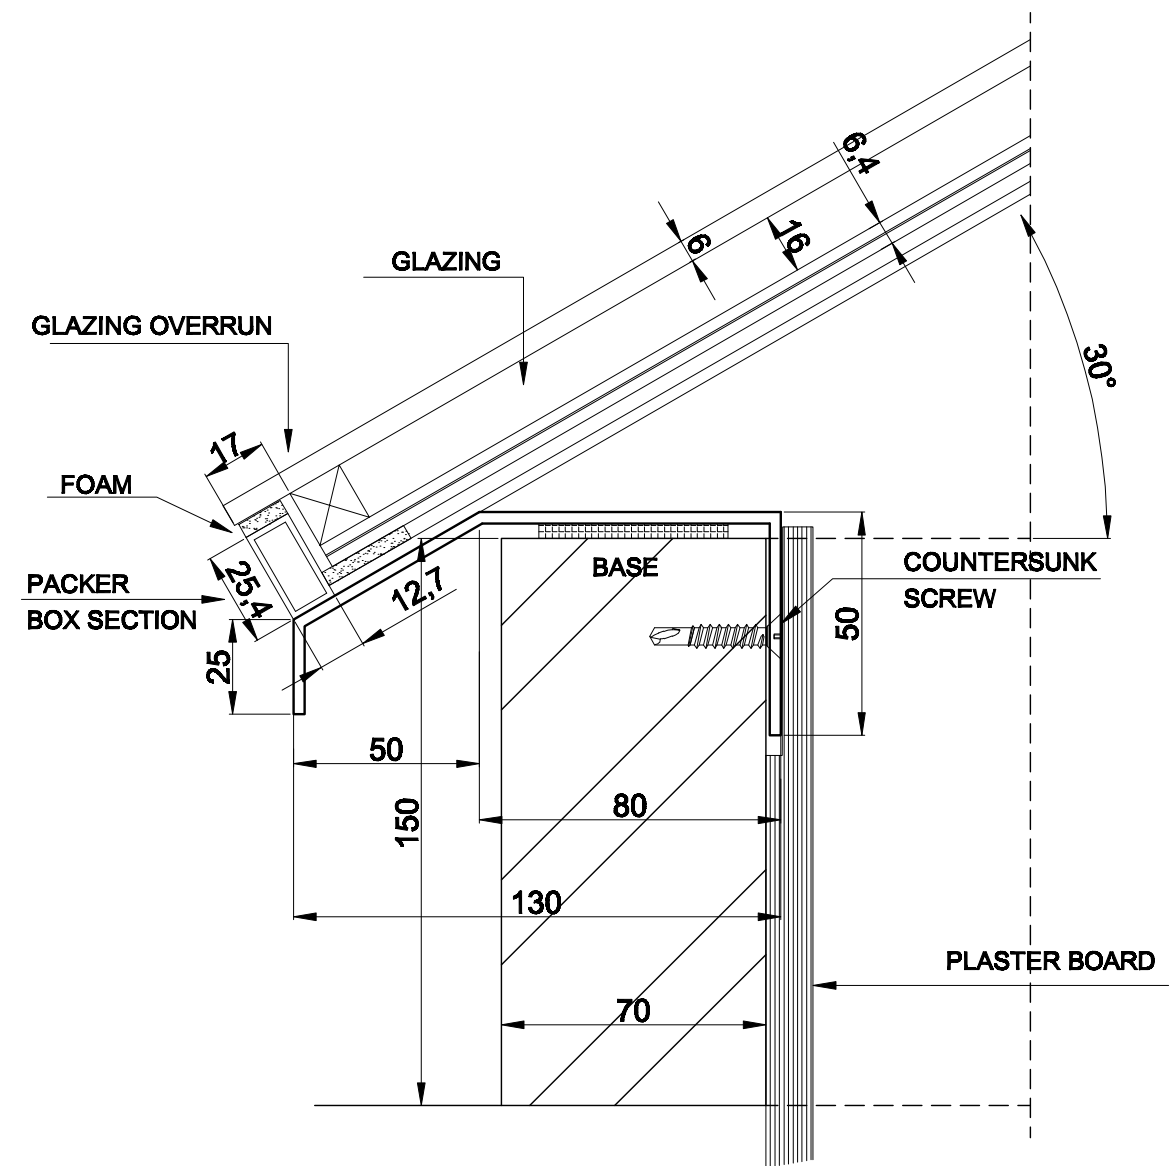

**STRUCTURE:**  
**3 mm MK. 7 BASE WITH ANGLED FLANGE**  
**3 mm VERTICAL ANGLES TO FORM A PYRAMID**  
**FLASHING ANGLES**  
**FRONT BOX SECTION 12,7 x 25,4 mm TO HOLD GLAZING**  
**4 mm FOAM LAYERS**

DRAWING NUMBER :  
**A3 - MK7 - WEB 22**

**BBS Building Components**

DRAWING TITLE:  
**BBS-MARK 7 PYRAMID ROOFLIGHT**  
**ON SLIM UPSTAND , FIXED FROM INSIDE**

FIRST ISSUE DATE:  
**OCT.2013**  
 SCALE:  
**1:25 / 1:2**